


**HS • HSZ • HSE - TRASH PUMPS**

**HS / HSZ / HSE Series TRASH PUMPS:** Durable trash pumps in two sizes—a 1HP 3-inch discharge and a 1/2HP 2-inch discharge. Both designed to pump water containing sand, solids and debris with minimal wear and clogging. HS2.4S / 2.75S / 3.75S / 3.75SL are manual trash pumps, and HSZ2.4S / 2.75S / 3.75S / 3.75SL are automatic trash pumps with integrated float switches. HSE2.4S is a HS2.4S trash pump with Automatic Water Level Sensor.

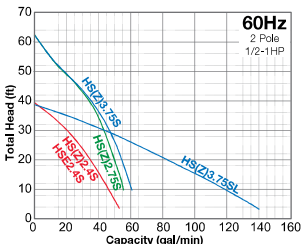


- HS • HSZ • HSE TRASH PUMP Features**
- Built-in shaft mounted agitator suspends solids
  - Urethane Semi Vortex Impeller for maximum durability and pump performance
  - Dual Inside Mechanical Seal With SIC faces provides longest operational life
  - Oil Lifter provides lubrication of the seal faces
  - V-Ring Seal design protects mechanical seal from abrasive particles

- Technical Features of Automatic (E) Water Level Sensor\***  
\*not for use in distilled or deionized water
- Sensitive electrodes detect water to start pump operation even when foreign materials are present
  - Internal 60-second timer eliminates frequent on/off operation in rough water to extend motor life
  - Automatic water level sensor completely molded in resin and covered by rubber case for protection against rough handling.
  - Jobsite tested for more than 30,000 on-off cycles without failure or damage

- Optional Accessories - See page 24-27**
- Vertical discharge coupling
  - 2-inch NPT coupling available for HS(2)3.75S

HSZ2.4S / 2.75S / 3.75S(L) Pump Dimension Reference



Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.


Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Float Start Level	Float Stop Level	Shipping Weight (lbs.)
					Diameter	Height				
HS2.4S	1/2	Single	2	20	10 1/16	12 15/16	3 1/2	N/A	N/A	30
HSZ2.4S	1/2	Single	2	20	13 1/2"	15 1/8"	15 1/8"	15 1/8"	4 3/4	30
HSZ2.4S	1/2	Single	2	32	10 1/16	14 1/8	6 1/2	N/A	N/A	30
HSZ2.75S	1	Single	2	32	11 7/16	15 5/16	3 1/2	N/A	N/A	47
HSZ2.75S	1	Single	2	32	13 1/2"	17 1/2"	17 1/2"	17 1/2"	7 1/8	47
HS3.75S	1	Single	3"	32	12 7/16	15 5/16	3 1/2	N/A	N/A	50
HS3.75SL	1	Single	3	32	12 7/16	16 3/4	4 3/4	N/A	N/A	55
HSZ3.75S	1	Single	3"	32	13 1/2"	17 1/2"	17 1/2"	17 1/2"	7 1/8	50
HSZ3.75SL	1	Single	3	32	15 3/4"	19 7/8"	19 7/8"	19 7/8"	7 1/8	55

\*2" is optional

\*Minimum Required Space \*Pump Starting Level

**HSD - EXTREME DUTY TRASH PUMP**

**EXTREME DUTY TRASH PUMP:** Pumps water containing sand, solids and debris with minimal wear and clogging.

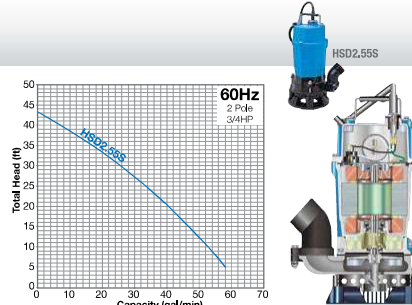


- HSD2.55S Trash Pump Features**
- Anti-wicking block prevents water incursion
  - Oil Lifter extends seal life by ten times
  - Dual Inside Mechanical Seal with silicon carbide faces provides longer operational life of any seal available
  - V-Ring Seal design protects mechanical seal from abrasive particles
  - Built-in larger shaft mounted agitator suspends solids & eliminates clogging
  - High Chromium Iron impeller & agitator
  - Ductile iron pump casing
  - 3/4 HP motor: larger than HS2.4S
  - Easy pump end disassembly
- Optional Accessories - See page 24-27**
- Float switch • Straight discharge
  - Discharge hoses • Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
HSD2.55S	3/4	Single	2	32	10 3/8	15 3/8	4 1/8	38

**NK - HEAVY DUTY HIGH HEAD PUMP**

Heavy duty, single phase high head pumps capable of handling abrasive materials with minimal wear.

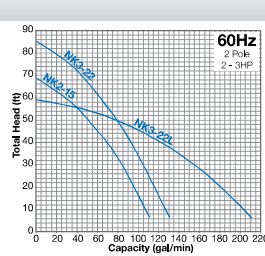

- NK2-15 • NK4-22 • NK3-22L Features**
- Terminal board for voltage reconnect allows for change from 110V to 220V (NK2-15 only)
  - NK2-15 & NK4-22: Semi Vortex Impeller and Synthetic Rubber Wear Plates for maximum durability and maintaining pump performance
  - NK3-22L: Semi-Open Impeller
  - Dual Inside Mechanical Seal With SIC faces provides longer operational life
  - Oil Lifter provides lubrication of the seal faces
  - V-Ring Seal design protects mechanical seal from abrasive particles
- Optional Accessories - See page 24-27**
- TS-303 & TS-304 Float Switch for automatic operation
  - Sand kit • 2" NPT coupling • Control panel
  - Discharge hoses • Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Heights		
NK2-15	2	Single	3"	32	9 7/16	24 1/2	3 1/4	80
NK4-22	3	Single	3"	32	9 7/16	24 3/16	3 1/4	81
NK3-22L	3	Single	3"	32	9 1/4	26 1/2	4 3/4	90